

Dielectric Filters (GIGAFIL®)




Band Pass Filters



DFCB Series 800/900MHz

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+-5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

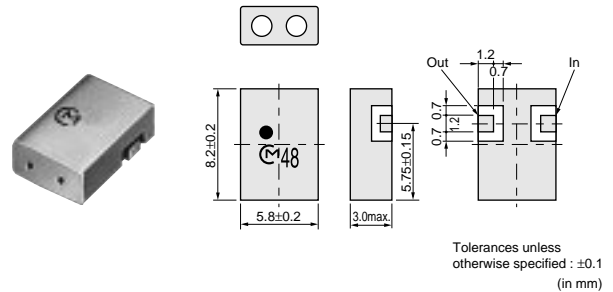

■ Characteristics

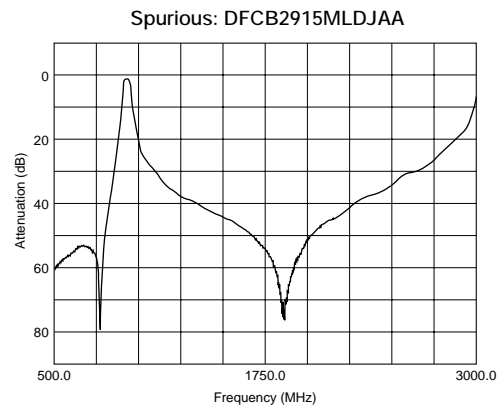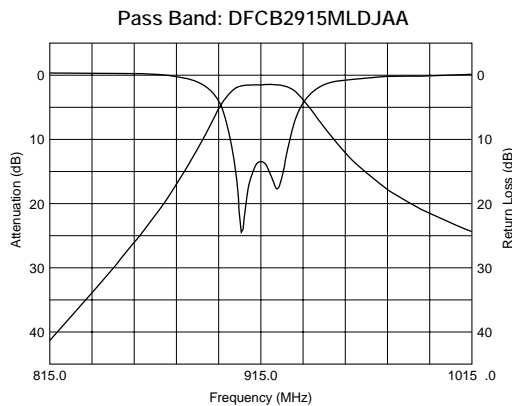

Application	Part Number	fo (MHz)	Bandwidth (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temp. (°C)
AMPS	DFCB2836MLDJAA	836.5	25	2.6	6.5 (869 to 894MHz)	-30 to +85
CT2	DFCB2841MLEJAA	841	4	3.0	38 (Fo-150MHz)	-30 to +85
CT2	DFCB2866MLEJAA	866	4	3.0	38 (Fo-150MHz)	-30 to +85
AMPS	DFCB2881MLDJAA	881.5	25	2.6	9 (824 to 849MHz)	-30 to +85
CT1+	DFCB2886MLEJAA	886	2	3.0	24 (Fo-44MHz)	-30 to +85
GSM	DFCB2902MLDJAA	902.5	25	2.6	27 (Fo-77.5MHz)	-30 to +85
WLAN915	DFCB2903MLEJAA	903	2	3.0	20 (Fo+22MHz)	-30 to +85
CT2	DFCB2912MLDJAA	912	4	2.0	50 (Fo-150MHz)	-30 to +85
CT2	DFCB2912MLEJAA	912	4	3.0	38 (Fo-150MHz)	-30 to +85
CT1	DFCB2914MLEJAA	914.5	1	3.0	24 (Fo-44MHz)	-30 to +85
WLAN915	DFCB2915MLDJAA	915	26	2.5	27 (837.5MHz)	-35 to +85
WLAN915	DFCB2926MLEJAA	926.25	2.7	2.8	21 (902.4 to 905.1MHz)	-30 to +85
WLAN915	DFCB2927MLEJAA	927	2	3.0	15 (Fo-22MHz)	-30 to +85
CT1+	DFCB2931MLEJAA	931	2	3.0	24 (Fo-44MHz)	-30 to +85
GSM	DFCB2947MLDJAA	947.5	25	2.6	27 (Fo-77.5MHz)	-30 to +85
CT1	DFCB2959MLEJAA	959.5	1	3.0	30 (Fo+44MHz)	-30 to +85
LMR	DFCB3815MLDJAA	815.5	19	2.5	12 (Fo±35.5MHz)	-30 to +85
AMPS	DFCB3836MLDJAA	836.5	25	3.0	12 (869 to 894MHz)	-30 to +85
CT2	DFCB3841MLEJAA	841	4	5.3	60 (Fo-150MHz)	-30 to +85
LMR	DFCB3860MLDJAA	860.5	19	2.5	13 (Fo-35.5MHz)	-30 to +85

Continued on the following page.

Continued from the preceding page.

Application	Part Number	fo (MHz)	Bandwidth (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temp. (°C)
CT2	DFCB3866MLEJAA	866	4	5.3	60 (Fo-150MHz)	-30 to +85
AMPS	DFCB3881MLDJAA	881.5	25	3.0	15 (824 to 849MHz)	-30 to +85
CT1+	DFCB3886MLEJAA	886	2	5.3	45 (Fo-44MHz)	-30 to +85
GSM	DFCB3902MLDJAA	902.5	25	3.0	45 (Fo-77.5MHz)	-30 to +85
WLAN915	DFCB3903MLEJAA	903	2	5.3	29 (Fo-22MHz)	-30 to +85
CT2	DFCB3912MLEJAA	912	4	5.3	60 (Fo-150MHz)	-30 to +85
CT1	DFCB3914MLEJAA	914.5	1	5.3	45 (Fo-44MHz)	-30 to +85
WLAN915	DFCB3915MLDJAA	915	26	3.0	15 (Fo-32.5MHz)	-30 to +85
WLAN915	DFCB3927MLEJAA	927	2	5.3	29 (Fo-22MHz)	-30 to +85
CT1+	DFCB3931MLEJAA	931	2	5.3	45 (Fo-44MHz)	-30 to +85
GSM	DFCB3947MLDJAA	947.5	25	3.0	45 (Fo-77.5MHz)	-30 to +85
CT1	DFCB3959MLEJAA	959.5	1	5.3	45 (Fo-44MHz)	-30 to +85


DFCB Series 1.5-5GHz

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine




DFCB22G33LBJAA

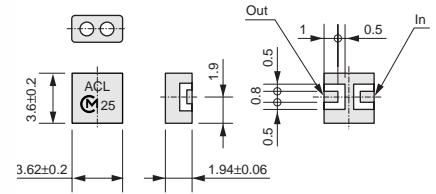

Tolerances unless otherwise specified : ±0.1 (in mm)




DFCB32G33LBJAA

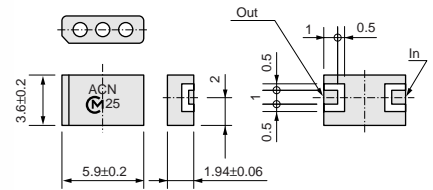

Tolerances unless otherwise specified : ±0.1 (in mm)




DFCB25G25LAHAA

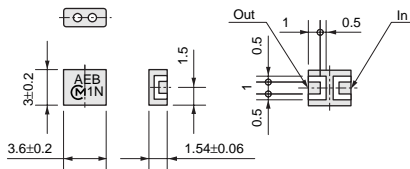

Tolerances unless otherwise specified : ±0.1 (in mm)




DFCB35G25LAHAA

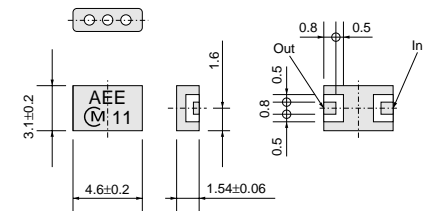


Tolerances unless otherwise specified : ±0.1 (in mm)

■ Characteristics

Pass Band: DFCB22G33LBJAA

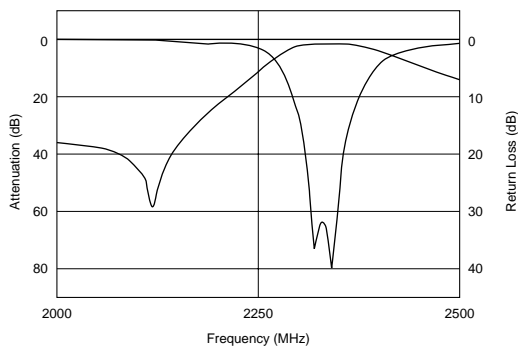

Spurious: DFCB22G33LBJAA

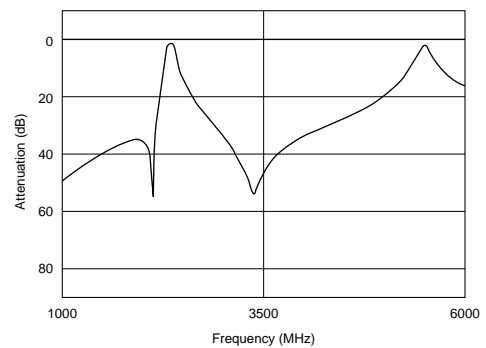


Continued on the following page. ↗


Continued from the preceding page.

Characteristics


Pass Band: DFCB32G33LBJAA

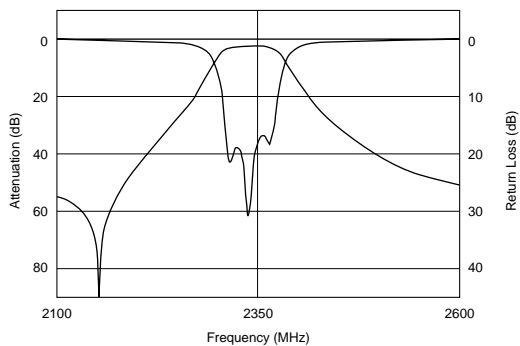


Spurious: DFCB32G33LBJAA

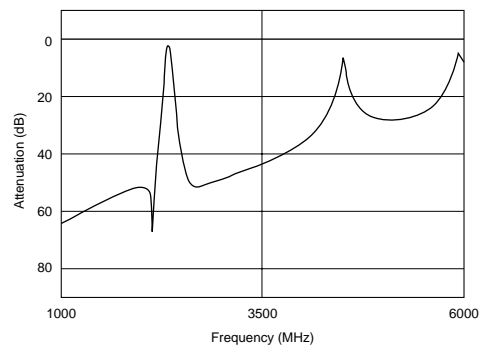


Pass Band: DFCB25G25LAHAA

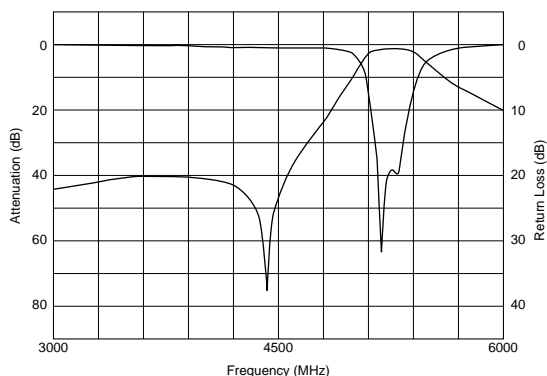


Spurious: DFCB25G25LAHAA

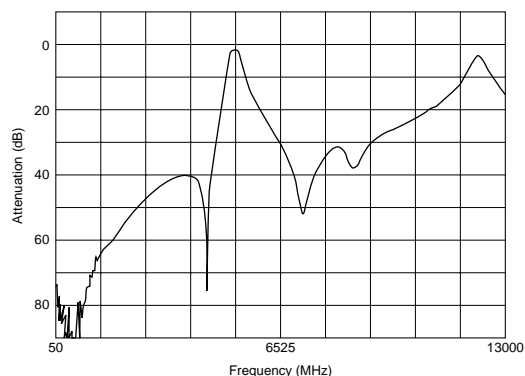

Pass Band: DFCB35G25LAHAA

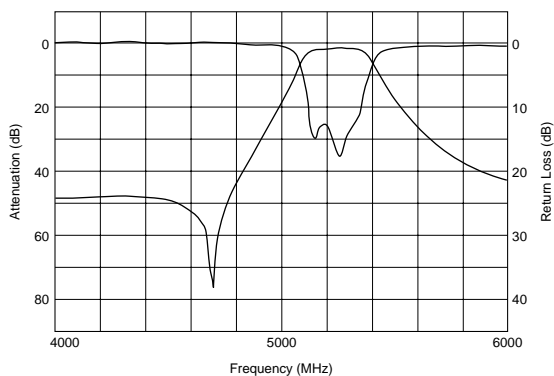

Spurious: DFCB35G25LAHAA

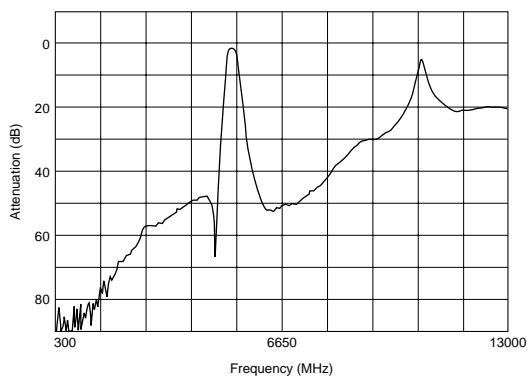

Application	Part Number	fo (MHz)	Bandwidth (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temp. (°C)
DAB	DFCB21G47LBJAA	1472	40	2.0	38 (1122MHz)	-30 to +85
PDC1.5	DFCB21G48LBJAA	1489	24	1.4	10 (1607 to 1631MHz)	-30 to +85
GPS	DFCB21G57LBJAB	1575.42	3	1.3	37 (1850 to 1910MHz)	-35 to +85
GPS	DFCB21G57LCJAA	1575.42	2	3.5	15 (Fo±50MHz)	-30 to +85
GPS	DFCB21G57LDJAB	1575.42	2	3.15	18 (Fo±50MHz)	-30 to +85
DCS1800	DFCB21G84LDJAA	1842.5	75	2.0	20 (Fo-160MHz)	-35 to +85
PCS1.9	DFCB21G88LDJAA	1880	60	1.5	17 (2280MHz)	-30 to +85
DECT	DFCB21G89LBJAA	1890	20	2.0	40 (1660 to 1680MHz)	-30 to +85
DECT	DFCB21G89LBJAB	1890	20	1.7	35 (1660 to 1680MHz)	-30 to +85
DECT	DFCB21G89LDHAA	1890	20	0.9	27 (1655 to 1679MHz)	-10 to +55
DECT	DFCB21G89LDJAA	1890	20	2.0	45 (1660 to 1680MHz)	-30 to +85
PHS	DFCB21G90LBJAA	1907.5	25	1.0	20 (1655 to 1680MHz)	-15 to +55

Continued on the following page. ↗


Continued from the preceding page.

Application	Part Number	fo (MHz)	Bandwidth (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temp. (°C)
PHS	DFCB21G90LBJAB	1907.5	25	1.6	35 (1655 to 1680MHz)	-15 to +55
PHS	DFCB21G90LBJAC	1907.5	25	1.9	45 (1655 to 1680MHz)	-15 to +55
DECT (CHINA)	DFCB21G91LBJAA	1910	20	1.7	34 (1675 to 1700MHz)	-30 to +85
DECT (CHINA)	DFCB21G91LDJAA	1910	20	1.8	40 (1675 to 1700MHz)	-30 to +85
CDMA1.9	DFCB21G92LBJAA	1920	20	1.2	20 (1655 to 1694MHz)	-30 to +85
CDMA1.9	DFCB21G92LDJAA	1920	20	1.9	16 (1800 to 1820MHz)	-30 to +85
PCS1.9	DFCB21G96LDJAA	1960	60	1.5	17 (2360MHz)	-30 to +85
TD-SCDMA	DFCB22G01LBJAA	2017.5	15	1.5	35 (1270MHz)	-35 to +85
W-CDMA	DFCB22G14LBJAA	2140	60	2.7	26 (1920 to 1980MHz)	-30 to +85
Sirius Radio	DFCB22G32LBJAA	2326	14	1.8	8.5 (2227MHz)	-35 to +85
XM Satellite	DFCB22G33LBJAA	2339	14	1.8	8.5 (2240MHz)	-35 to +85
WLAN2.4	DFCB22G44LANAA	2441.5	83	1.5	35 (2000MHz)	-35 to +85
WLAN2.4	DFCB22G44LBJAA	2442	84	2.0	16 (Fo-250MHz)	-30 to +85
WLAN2.4	DFCB22G45LBJAA	2450	100	2.0	15 (Fo-250MHz)	-30 to +85
WLAN2.4	DFCB22G48LBJAA	2484	26	2.0	27.5 (Fo-204MHz)	-30 to +85
VICS	DFCB22G50LBJAA	2500	4	4.5	20 (2440MHz)	-30 to +85
WLAN5G	DFCB25G25LAHAA	5250	200	1.5	38 (4370 to 4510MHz)	-35 to +85
WLAN5G	DFCB25G59LAHAA	5597.5	255	1.5	11 (Fo-375MHz)	-35 to +85
WLAN5G	DFCB25G77LAHAA	5775	100	1.5	12 (Fo-375MHz)	-35 to +85
ETC	DFCB25G80LBHAA	5800	100	2.0	25 (Fo-375MHz)	-30 to +85
DAB	DFCB31G47LBJAA	1472	40	3.0	45 (1100MHz)	-35 to +85
DCS1800	DFCB31G74LBJAA	1747.5	75	3.5	45 (1464 to 1539MHz)	-30 to +85
DCS1800	DFCB31G84LBJAA	1842.5	75	3.5	45 (1559 to 1634MHz)	-30 to +85
DCS1800	DFCB31G84LBJAB	1842.5	75	2.75	45 (0.3 to 1388MHz)	-30 to +85
PCS1.9	DFCB31G88LBJAA	1880	60	3.7	5 (1930MHz)	-30 to +85
PCS1.9	DFCB31G88LBJAB	1880	60	4.0	41 (2043 to 2103MHz)	-30 to +85
W-CDMA	DFCB31G95LBJAA	1950	60	3.5	35 (2110 to 2170MHz)	-30 to +85
PCS1.9	DFCB31G96LBJAA	1960	60	3.7	5 (1910MHz)	-30 to +85
PCS1.9	DFCB31G96LBJAB	1960	60	3.0	10 (1498 to 1860MHz)	-30 to +85
PCS1.9	DFCB31G96LBJAC	1960	60	2.8	10 (1860MHz)	-30 to +85
PCS1.9	DFCB31G96LBJAE	1960	60	3.7	20 (2065 to 2125MHz)	-35 to +85
W-CDMA	DFCB32G14LBJAA	2140	60	3.7	30 (1920 to 1980MHz)	-30 to +85
Sirius Radio	DFCB32G32LBJAA	2326	14	3.0	24 (2227MHz)	-35 to +85
XM Satellite	DFCB32G33LBJAA	2339	14	3.0	24 (2240MHz)	-35 to +85
WLAN2.4	DFCB32G44LBJAA	2442	84	3.2	30 (Fo-250MHz)	-30 to +85
WLAN2.4	DFCB32G45LBJAA	2450	100	3.2	30 (Fo-250MHz)	-30 to +85
WLAN5G	DFCB35G25LAHAA	5250	200	3.3	45 (4450 to 4650MHz)	-35 to +85
WLAN5G	DFCB35G59LAHAA	5597.5	255	3.6	45 (4750 to 5000MHz)	-35 to +85
WLAN5G	DFCB35G77LAHAA	5775	100	3.0	30 (Fo-375MHz)	-35 to +85
WLAN5G	DFCB35G80LBHAA	5800	150	3.4	10 (Fo-175MHz)	-35 to +85





DFCH Series 800/900MHz

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

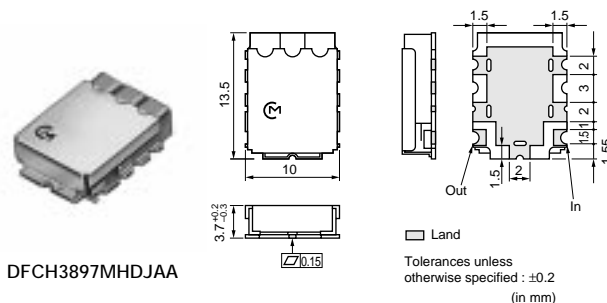

■ Characteristics

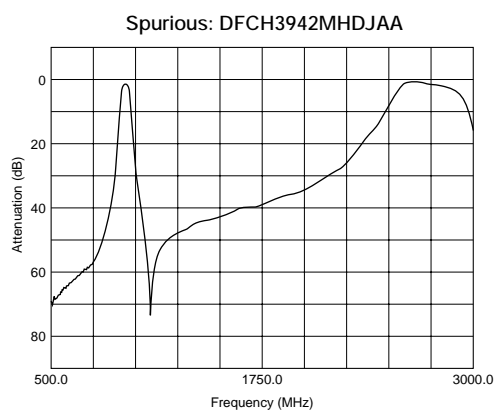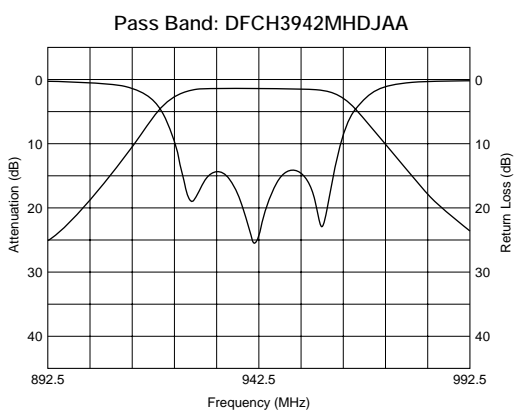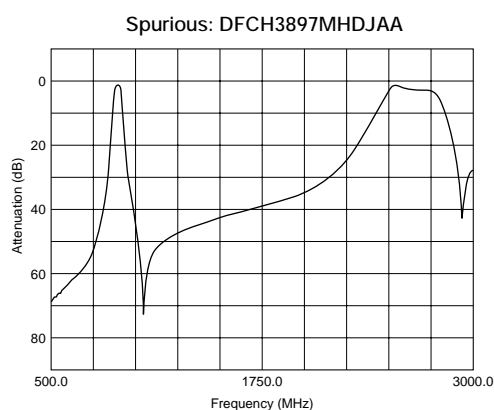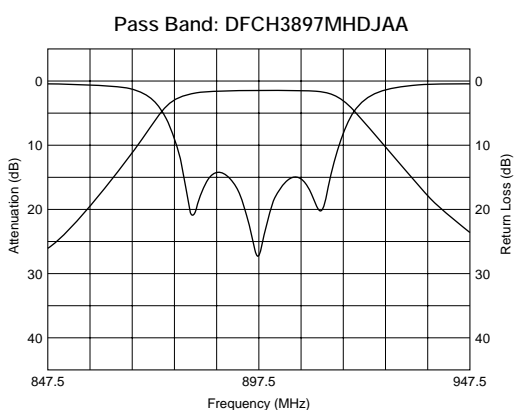

Application	Part Number	fo (MHz)	Bandwidth (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temp. (°C)
LMR	DFCH3815MHDJAA	815	20	2.8	36 (Fo±80MHz)	-30 to +85
AMPS	DFCH3836MHDJAA	836.5	25	2.6	12 (Fo±32.5MHz)	-30 to +85
LMR	DFCH3860MHDJAA	860	20	2.8	36 (Fo±80MHz)	-30 to +85
AMPS	DFCH3881MHDJAA	881.5	25	2.6	12 (Fo±32.5MHz)	-30 to +85
ETACS	DFCH3888MHDJAA	888.5	33	3.0	7 (Fo±28.5MHz)	-30 to +85
EGSM	DFCH3897MHDJAA	897.5	35	3.0	6 (Fo±27.5MHz)	-30 to +85
GSM	DFCH3902MHDJAA	902.5	25	2.6	12 (Fo±32.5MHz)	-30 to +85
ETACS	DFCH3933MHDJAA	933.5	33	3.0	7 (Fo±28.5MHz)	-30 to +85
EGSM	DFCH3942MHDJAA	942.5	35	3.0	6 (Fo±27.5MHz)	-30 to +85
GSM	DFCH3947MHDJAA	947.5	25	2.6	12 (Fo±32.5MHz)	-30 to +85
ETACS	DFCH4888MHDJAA	888.5	33	4.6	15 (Fo±28.5MHz)	-30 to +85

Continued on the following page. ↗

Continued from the preceding page.


Application	Part Number	fo (MHz)	Bandwidth (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temp. (°C)
EGSM	DFCH4897MHDJAA	897.5	35	4.6	13 (Fo±27.5MHz)	-30 to +85
ETACS	DFCH4933MHDJAA	933.5	33	4.6	15 (Fo±28.5MHz)	-30 to +85
EGSM	DFCH4942MHDJAA	942.5	35	4.6	13 (Fo±27.5MHz)	-30 to +85

Application	Part Number	fo (MHz)	Bandwidth (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temp. (°C)
GPS	DFCH21G57HDHAA	1575.5	2	0.9	16 (Fo-140MHz)	-30 to +85
PHS	DFCH21G90HDJAA	1907.5	25	0.7	35 (Fo-227.5MHz)	-30 to +85
WLAN2.4	DFCH22G44HDHAA	2442	84	1.2	15 (Fo±250MHz)	-30 to +85
WLAN2.4	DFCH22G45HDHAA	2450	100	1.0	16 (Fo-250MHz)	-30 to +85
WLAN2.4	DFCH22G48HDHAA	2484	26	2.5	47 (Fo-270MHz)	-30 to +85
VICS	DFCH22G50HDHAA	2500	4	2.4	10 (Fo±60MHz)	-30 to +85
MSAT	DFCH31G54HDJAA	1542	34	3.0	30 (1626.5 to 1660.5MHz)	-30 to +85
MSAT	DFCH31G64HDJAA	1643.5	34	3.0	30 (1525 to 1559MHz)	-30 to +85
DCS1800	DFCH31G74HDJAA	1747.5	75	2.0	8 (Fo±80MHz)	-30 to +85
DCS1800	DFCH31G84HDJAA	1842.5	75	2.0	8 (Fo±80MHz)	-30 to +85
PCS1.9	DFCH31G88HDJAA	1880	60	2.2	15 (Fo±100MHz)	-30 to +85
W-CDMA	DFCH31G95HDHAA	1950	60	1.8	45 (1550MHz)	-30 to +85
PCS1.9	DFCH31G96HDJAA	1960	60	2.2	15 (Fo±100MHz)	-30 to +85
W-CDMA	DFCH32G14HDHAA	2140	60	1.3	52 (1325 to 1385MHz)	-30 to +85
MMDS	DFCH32G15HDHAB	2156	20	3.0	36 (2050MHz)	-35 to +85
WLAN2.4	DFCH32G44HDHAA	2442	84	2.4	36 (Fo-250MHz)	-30 to +85
WLAN2.4	DFCH32G45HDHAA	2450	100	2.3	36 (Fo-250MHz)	-30 to +85
WLAN2.4	DFCH32G48HDHAA	2484	26	3.0	45 (Fo-270MHz)	-30 to +85
DCS1800	DFCH41G74HDJAA	1747.5	75	3.6	10 (Fo±57.5MHz)	-30 to +85
DCS1800	DFCH41G84HDJAA	1842.5	75	3.6	10 (Fo±57.5MHz)	-30 to +85
PCS1.9	DFCH41G88HDJAA	1880	60	4.5	12 (Fo±50MHz)	-30 to +85
PCS1.9	DFCH41G96HDJAA	1960	60	4.5	12 (Fo±50MHz)	-30 to +85
MMDS	DFCH42G59HDHAB	2593	186	1.8	50 (Fo-400MHz)	-35 to +85

for RF/Local

Chip Multilayer LC Filters (BPF)



● LFB18/21/2H/31_SG Series

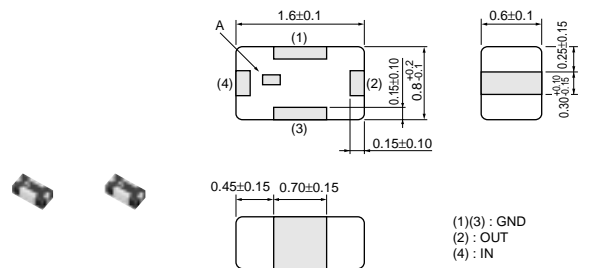

LFB18_SG Series

A : Directional Input Mark
 All the technical data and information contained herein are subject to change without prior notice. (in mm)



Frequency Characteristics

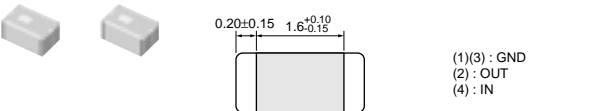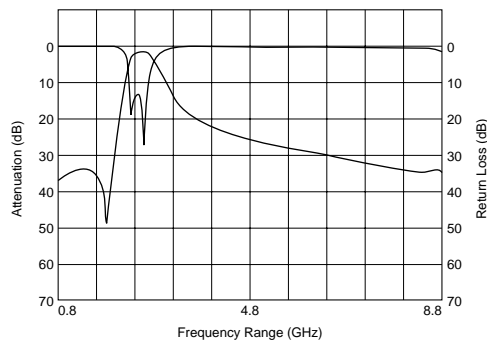

LFB21_SG Series

A : Directional Input Mark
 All the technical data and information contained herein are subject to change without prior notice. (in mm)



Frequency Characteristics

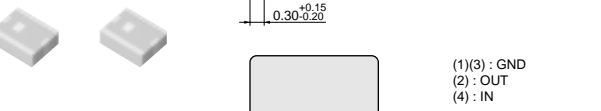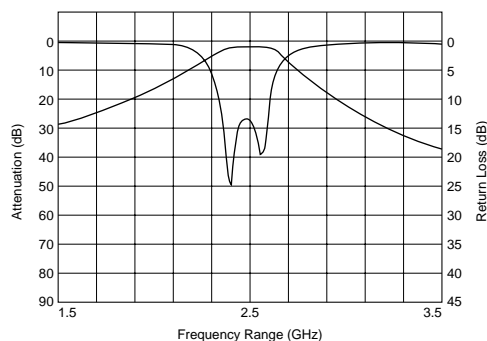

LFB2H_SG Series

A : Directional Input Mark
 All the technical data and information contained herein are subject to change without prior notice. (in mm)


Frequency Characteristics

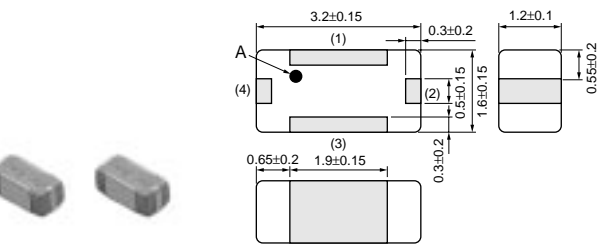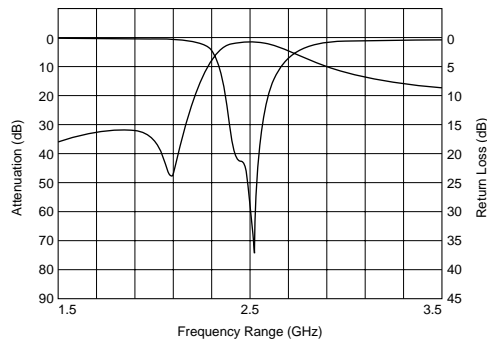

LFB31_SG Series

A : Directional Input Mark
 All the technical data and information contained herein are subject to change without prior notice. (in mm)

Frequency Characteristics

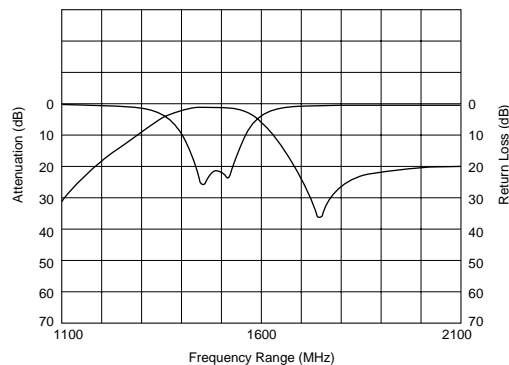


Filters for Communication Equipment

7


Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
 • You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

Part Number	Nominal Center Frequency (fo) (MHz)	Bandwidth (BW) (MHz)	Insertion Loss in BW (dB)	Attenuation (Absolute Value) I (dB)	Attenuation (Absolute Value) II (dB)
LFB182G45SG9A246	2450.0	fo±50.0	2.2 max. (at 25°C)	24.5 min. at 880~960MHz	12.5 min. at 1710~1990MHz
LFB212G45SG8A127	2450.0	fo±50.0	1.5 max. (at 25°C)	25.0 min. at 1200~1300MHz	10.0 min. at 2000MHz
LFB212G45SG8A166	2450.0	fo±50.0	1.4 max. (at 25°C)	30.0 min. at 880~915MHz	30.0 min. at 1710~1910MHz
LFB212G45SG8A192	2450.0	fo±50.0	2.6 max. (at 25°C)	40.0 min. at 880~960MHz	38.0 min. at 1710~1990MHz
LFB215G12SG8A178	5125.0	fo±225.0	1.5 max. (at 25°C)	25.0 min. at 4200MHz	17.0 min. at 2x(fo±225)MHz
LFB215G12SG8A183	5125.0	fo±225.0	1.5 max. (at 25°C)	10.0 min. at 4250MHz	10.0 min. at 5900MHz
LFB215G25SG8A144	5250.0	fo±100.0	1.5 max. (at 25°C)	30.0 min. at 3450MHz	-
LFB215G37SG8A180	5375.0	fo±475.0	1.8 max. (at 25°C)	29.5 min. at 500~4000MHz	34.5 min. at 3450MHz
LFB215G37SG8A185	5375.0	fo±475.0	2.2 max. (at 25°C)	40.0 min. at 340~1195MHz	21.0 min. at 2140~3580MHz
LFB215G51SG8A132	5512.0	fo±363.0	1.9 max. (at 25°C)	30.0 min. at 500~4000MHz	20.0 min. at 4600MHz
LFB215G51SG8A154	5512.0	fo±363.0	1.5 max. (at 25°C)	30.0 min. at 500~4000MHz	20.0 min. at 4600MHz
LFB215G78SG8A170	5787.5	fo±62.5	2.2 max. (at 25°C)	35.0 min. at 3275~3400MHz	37.0 min. at 2x(fo±62.5)MHz
LFB2H2G45SG7A134	2450.0	fo±50.0	1.7 max. (at 25°C)	25.0 min. at 1750MHz	25.0 min. at 2100MHz
LFB2H2G45SG7A135	2450.0	fo±50.0	2.7 max. (at 25°C)	40.0 min. at 880~915MHz	40.0 min. at 1710~1950MHz
LFB2H2G45SG7A158	2450.0	fo±50.0	1.2 max. (at 25°C)	30.0 min. at 880~915MHz	30.0 min. at 1710~1785MHz
LFB2H2G45SG7A159	2450.0	fo±50.0	2.1 max. (at 25°C)	45.0 min. at 880~915MHz	48.0 min. at 1710~1990MHz
LFB2H2G45SG7A204	2450.0	fo±50.0	3.0 max. (at 25°C)	45.0 min. at 880~915MHz	27.0 min. at 1710~1990MHz
LFB2H5G78SG7A175	5787.5	fo±62.5	2.5 max. (at 25°C)	51.5 min. at 902~928MHz	41.0 min. at 3919~4044MHz
LFB311G48SG1-985	1489.0	fo±12.0	1.5 max. (at 25°C)	25.0 min. at (fo±12.0)+260MHz	28.0 min. at 1749MHz
LFB311G90SG1-799	1906.5	fo +24.5/-13.5MHz	2.5 max. (at 25°C)	40.0 min. at 1397.05~1422.85MHz	35.0 min. at 1645.5~1671.3MHz
LFB311G90SG2-797	1906.5	fo±13.5	2.7 max. (at 25°C)	40.0 min. at 1427~1454MHz	35.0 min. at 1660~1687MHz
LFB311G95SG3A564	1950.0	fo±30.0	3.5 max. (at 25°C)	20.0 min. at 2110~2170MHz	25.0 min. at 2490~2550MHz
LFB312G45SG2A509	2450.0	fo±50.0	2.0 max. (at 25°C)	38.0 min. at 902~928MHz	15.0 min. at 2100~2200MHz
LFB312G45SG7A572	2450.0	fo±50.0	2.5 max. (at 25°C)	37.0 min. at 902~928MHz	20.0 min. at 2100~2200MHz

● LFB31_SL Series (1206)

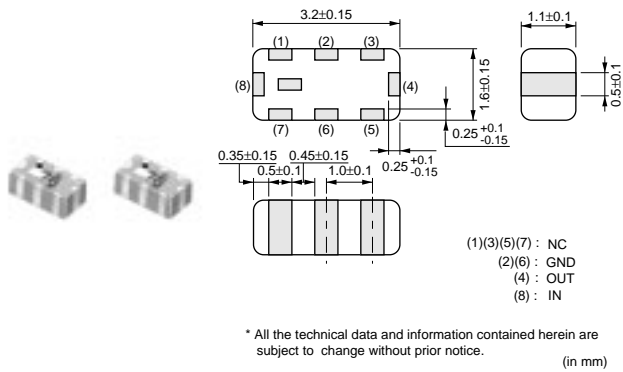


Frequency Characteristics

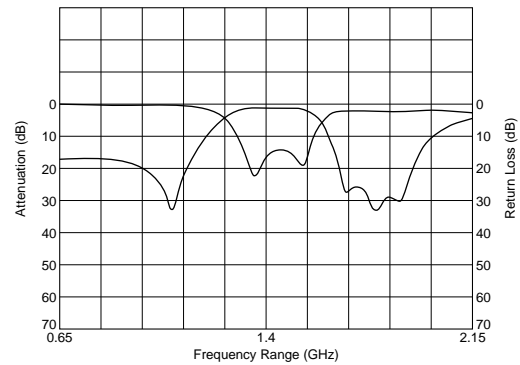

Part Number	Nominal Center Frequency (fo) (MHz)	Bandwidth (BW) (MHz)	Insertion Loss in BW (dB)	Attenuation (Absolute Value) I (dB)	Attenuation (Absolute Value) II (dB)
LFB311G40SL1A562	1402.5	fo±77.5	3.0 max. (at 25°C)	20.0 min. at 1005~1080MHz	20.0 min. at 1725~1760MHz


△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
 • You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

● LFB31_SN Series (1206)

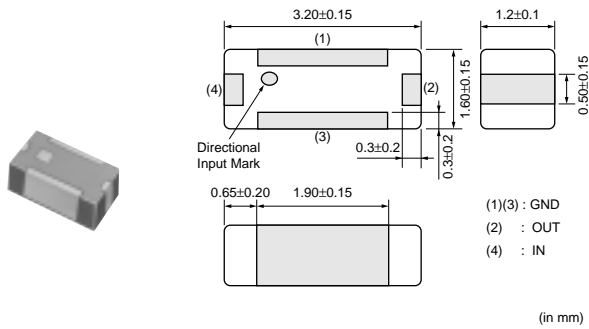


(in mm)
All the technical data and information contained herein are subject to change without prior notice.

Frequency Characteristics

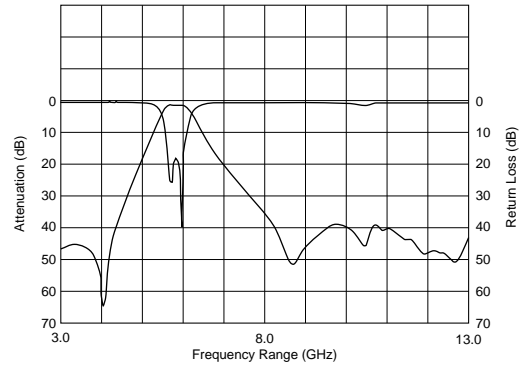


Part Number	Nominal Center Frequency (fo) (MHz)	Bandwidth (BW) (MHz)	Insertion Loss in BW (dB)	Attenuation (Absolute Value) I) (dB)	Attenuation (Absolute Value) II) (dB)
LFB315G82SN5-996	5820.0	fo±30.0	2.0 max. (at 25°C)	35.0 min. at 2000MHz	30.0 min. at 3000MHz

● LFB31_SP Series (1206)

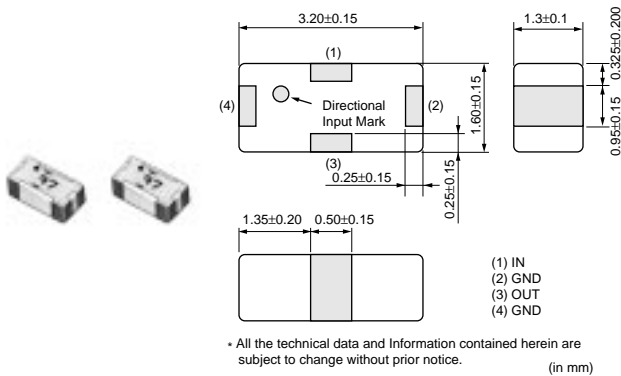


(in mm)
* All the technical data and information contained herein are subject to change without prior notice.

Frequency Characteristics

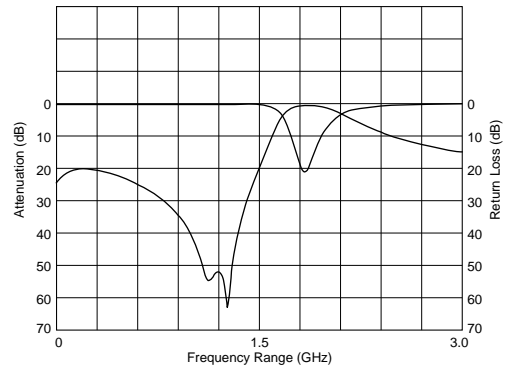


Part Number	Nominal Center Frequency (fo) (MHz)	Bandwidth (BW) (MHz)	Insertion Loss in BW (dB)	Attenuation (Absolute Value) I) (dB)	Attenuation (Absolute Value) II) (dB)
LFB311G89SP1A542	1890.0	fo±10.0	0.85 max. (at 25°C)	29.0 min. at 1416.9~1436.9Hz	22.0 min. at 900MHz
LFB311G90SP1-798	1906.5	fo±13.5	1.0 max. (at 25°C)	38.0 min. at 1405~1440MHz	12.0 min. at 1649~1680MHz
LFB312G45SP1A502	2450.0	fo±50.0	1.4 max. (at 25°C)	20.0 min. at 902~928MHz	35.0 min. at 1500~1550MHz

● LFB32_SA Series (1210)

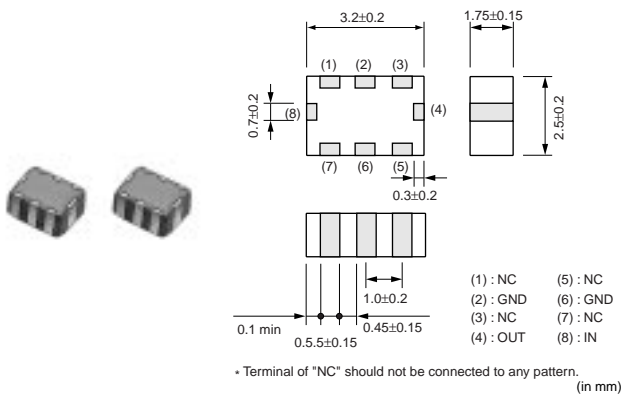

(in mm)
* Terminal of *NC* should not be connected to any pattern.

Frequency Characteristics

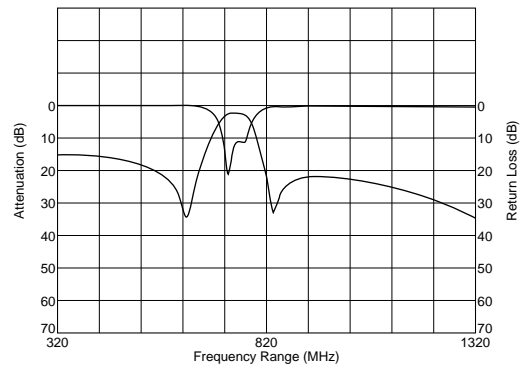


7 Filters for Communication Equipment


Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

Part Number	Nominal Center Frequency (fo) (MHz)	Bandwidth (BW) (MHz)	Insertion Loss in BW (dB)	Attenuation (Absolute Value) I (dB)	Attenuation (Absolute Value) II (dB)
LFB32741MSA1-744	741.5	fo±19.5	3.5 max. (at 25°C)	20.0 min. at 612~650MHz	20.0 min. at 832~870MHz
LFB32836MSA1-747	836.5	fo±12.5	3.0 max. (at 25°C)	19.5 min. at fo±77.5MHz	-
LFB32851MSA1A540	851.0	fo±19.0	3.5 max. (at 25°C)	20.0 min. at fo-90.0MHz	18.0 min. at fo+90.0MHz
LFB32881MSA1-781	881.5	fo±12.5	4.8 max. (at 25°C)	11.0 min. at 824~837MHz	5.0 min. at 846~849MHz
LFB32881MSA1A556	881.5	fo±12.5	3.2 max. (at 25°C)	20.0 min. at fo±77.5MHz	-
LFB32902MSA1A536	902.5	fo±12.5	3.0 max. (at 25°C)	15.0 min. at 802~827MHz	15.0 min. at 978~1003MHz
LFB32906MSA1A539	906.0	fo±19.0	3.5 max. (at 25°C)	20.0 min. at fo-90.0MHz	18.0 min. at fo+90.0MHz
LFB32947MSA1A537	947.0	fo±12.5	3.0 max. (at 25°C)	9.0 min. at D.C.-835MHz	6.0 min. at 1000~1394MHz
LFB32991MSA1-762	991.15	fo±12.5	3.0 max. (at 25°C)	20.0 min. at 869~894MHz	20.0 min. at 1088.3~1113.3MHz
LFB321G44SA1A538	1441.0	fo±12.0	3.0 max. (at 25°C)	25.0 min. at 1607~1631MHz	-
LFB321G61SA1A555	1619.0	fo±12.0	2.8 max. (at 25°C)	20.0 min. at 1477~1501MHz	16.0 min. at 1429~1453MHz

● LFB32_SB Series (1210)

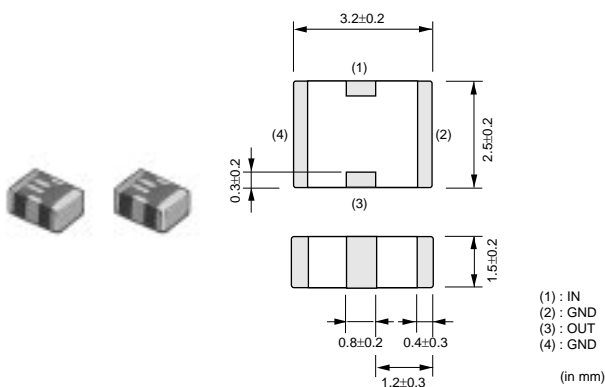


Frequency Characteristics

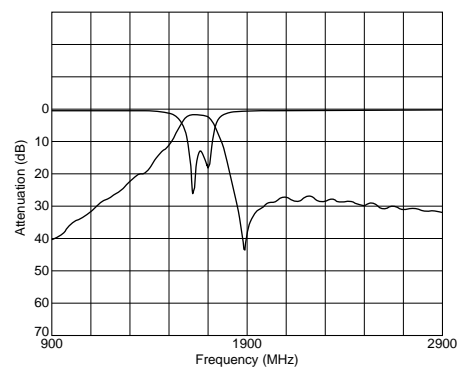


Part Number	Nominal Center Frequency (fo) (MHz)	Bandwidth (BW) (MHz)	Insertion Loss in BW (dB)	Attenuation (Absolute Value) I (dB)	Attenuation (Absolute Value) II (dB)
LFB321G66SB1-560	1662.0	fo±12.5	2.0 max. (at 25°C)	27.0 min. at 1895~1918MHz	20.0 min. at 2xfo MHz
LFB321G89SB1-591	1890.0	fo±10.0	1.2 max. (at 25°C)	21.0 min. at 1655~1675MHz	15.0 min. at 2xfo MHz
LFB321G90SB1-559	1907.5	fo±12.5	1.0 max. (at 25°C)	35.0 min. at 1397.5~1440MHz	20.0 min. at 1646~1680MHz

● LFB32_SC Series (1210)

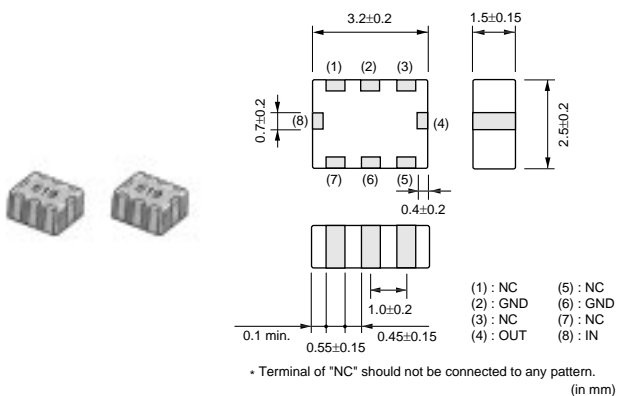


Frequency Characteristics

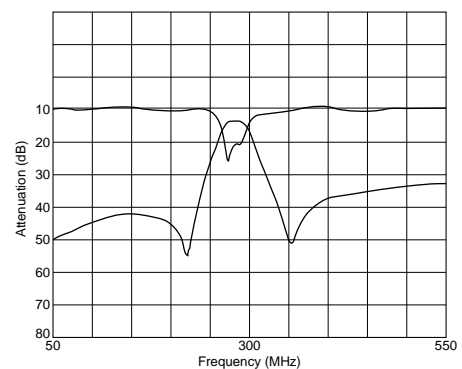


△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
 • You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

Part Number	Nominal Center Frequency (fo) (MHz)	Bandwidth (BW) (MHz)	Insertion Loss in BW (dB)	Attenuation (Absolute Value) I (dB)	Attenuation (Absolute Value) II (dB)
LFB32284MSC1-596	284.0	fo±4.0	3.8 max. (at 25°C)	31.0 min. at 220~228MHz	23.0 min. at 340~348MHz
LFB32312MSC1-597	312.25	fo±1.0	3.5 max. (at 25°C)	26.0 min. at 249.8MHz	26.0 min. at 374.7MHz
LFB32315MSC1-604	315.0	fo±0.5	3.5 max. (at 25°C)	45.0 min. at 180MHz	29.0 min. at 470MHz
LFB32315MSC1-619	315.0	fo±0	3.5 max. (at 25°C)	30.0 min. at 235MHz	30.0 min. at 395MHz
LFB32426MSC1-603	426.5	fo±0.5	3.6 max. (at 25°C)	25.0 min. at 366.5MHz	20.0 min. at 486.5MHz
LFB32820MSC2-749	820.0	fo±10.0	1.3 max. (at 25°C)	22.0 min. at 1070~1090MHz	-
LFB32847MSC2-766	847.5	fo±37.5	1.5 max. (at 25°C)	16.0 min. at 550~625MHz	15.0 min. at 1070~1145MHz

● LFB32_SJ Series (1210)

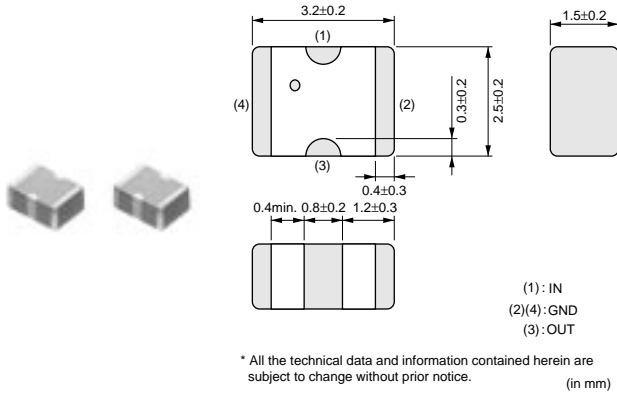


Frequency Characteristics

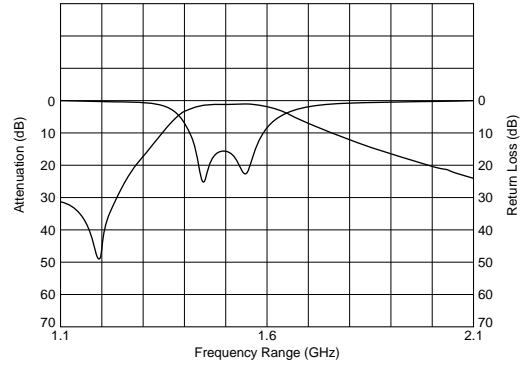


Part Number	Nominal Center Frequency (fo) (MHz)	Bandwidth (BW) (MHz)	Insertion Loss in BW (dB)	Attenuation (Absolute Value) I (dB)	Attenuation (Absolute Value) II (dB)
LFB321G47SJ1-794	1472.0	fo±20.0	1.3 max. (at 25°C)	30.0 min. at 1172MHz	-

● LFB32_SK Series (1210)

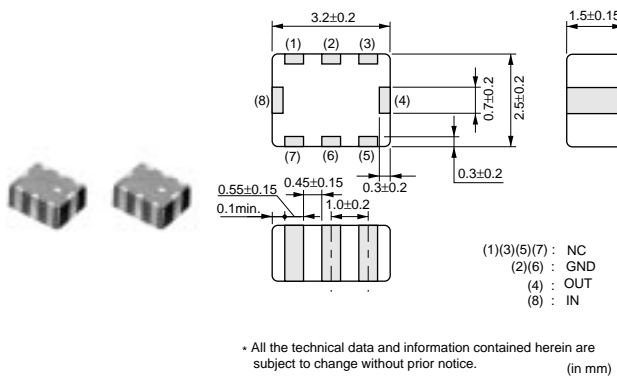


Frequency Characteristics

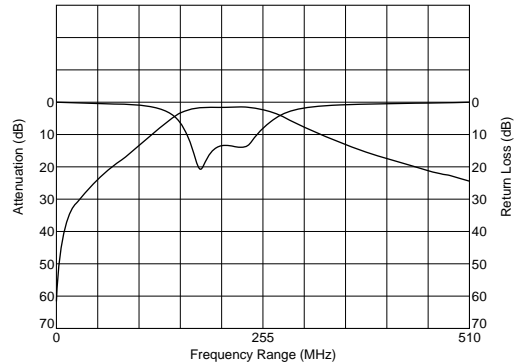


Part Number	Nominal Center Frequency (fo) (MHz)	Bandwidth (BW) (MHz)	Insertion Loss in BW (dB)	Attenuation (Absolute Value) I (dB)	Attenuation (Absolute Value) II (dB)
LFB32205MSK1-948	205.5	fo±31.5	1.5 max. (at 25°C)	10.0 min. at 100MHz	20.0 min. at 500MHz

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
 • You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

● LFB32_SN Series (1210)

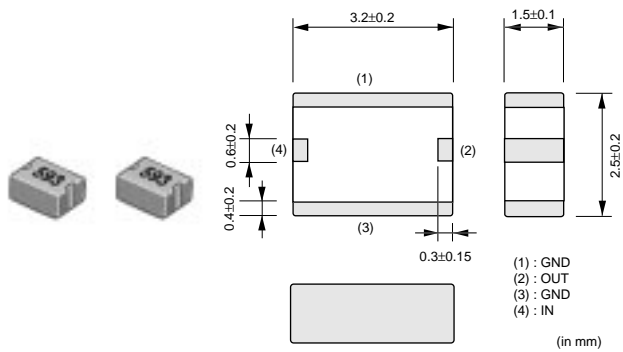

Frequency Characteristics

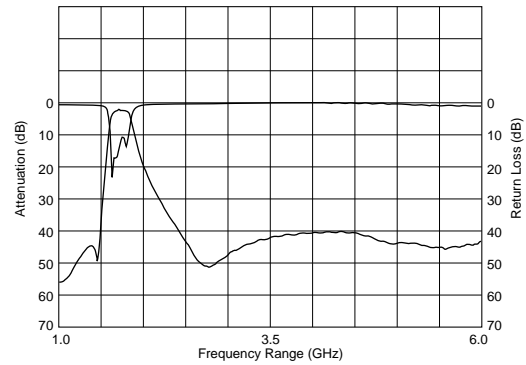


Part Number	Nominal Center Frequency (fo) (MHz)	Bandwidth (BW) (MHz)	Insertion Loss in BW (dB)	Attenuation (Absolute Value) I) (dB)	Attenuation (Absolute Value) II) (dB)
LFB321G74SN1-770	1747.5	fo±37.5	2.5 max. (at 25°C)	20.0 min. at D.C. - 1350MHz	30.0 min. at 1350~1425MHz
LFB321G84SN1-796	1842.5	fo±37.5	2.5 max. (at 25°C)	48.0 min. at 500~1450MHz	40.0 min. at 1450~1480MHz
LFB321G90SN1-593	1907.5	fo±12.5	2.5 max. (at 25°C)	40.0 min. at 1406.5~1440MHz	35.0 min. at 1655~1680MHz
LFB322G45SN1-947	2450.0	fo±50.0	2.5 max. (at 25°C)	40.0 min. at 1950MHz	16.0 min. at 2200MHz
LFB322G45SN1A504	2450.0	fo±50.0	1.8 max. (at 25°C)	48.0 min. at 902~928MHz	50.0 min. at 1500~1550MHz
LFB322G45SN5A515	2450.0	fo±50.0	2.5 max. (at 25°C)	40.0 min. at 880~1250MHz	20.0 min. at 1250~1710MHz


for RF/Local

Chip Multilayer LC Filters (LPF)

● LFL15_TC (0402) /LFL18_TC (0603) /LFL21_TC (0805) Series

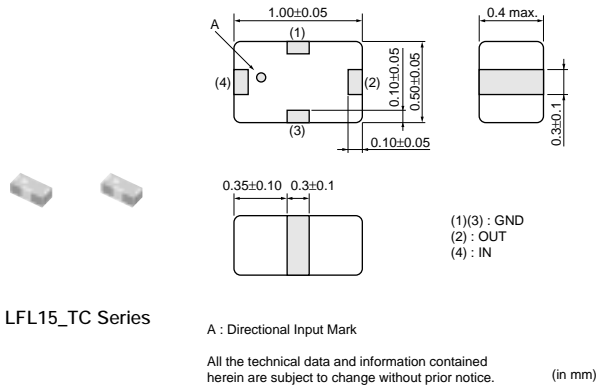


Frequency Characteristics

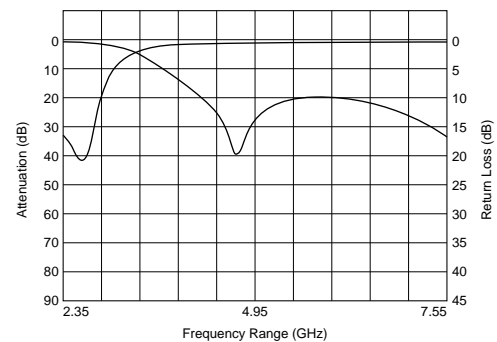


LFL15_TC Series

A : Directional Input Mark

All the technical data and information contained herein are subject to change without prior notice.

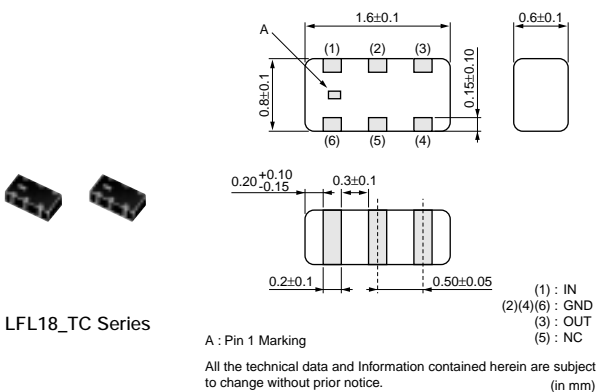

Frequency Characteristics

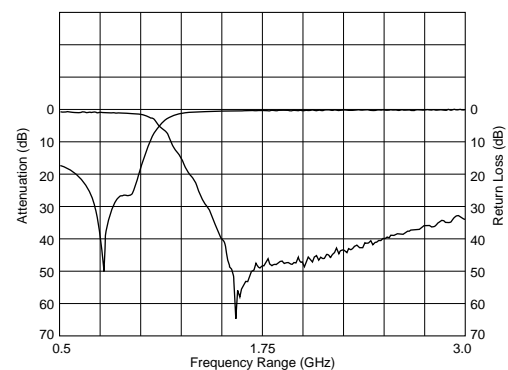

LFL18_TC Series

A : Pin 1 Marking

All the technical data and information contained herein are subject to change without prior notice.


Continued on the following page.

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

Continued from the preceding page.




LFL21_TC Series

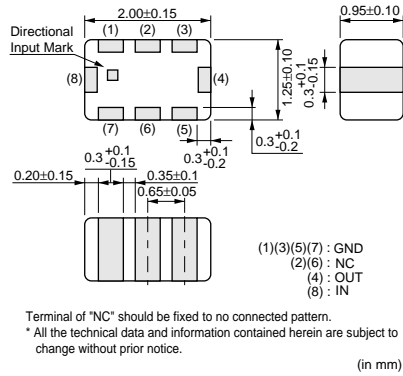

Terminal of "NC" should be fixed to no connected pattern.
 * All the technical data and information contained herein are subject to change without prior notice.

(in mm)

Frequency Characteristics

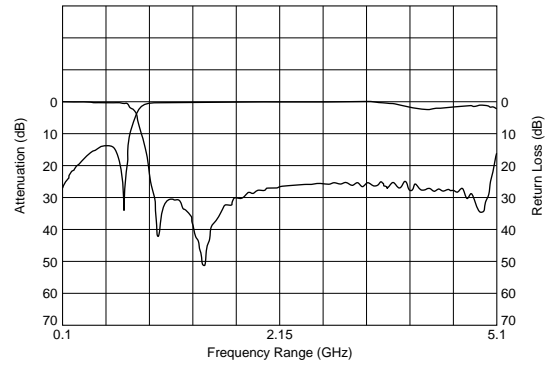


Part Number	Nominal Center Frequency (fo) (MHz)	Bandwidth (BW) (MHz)	Insertion Loss in BW (dB)	Attenuation (Absolute Value) I) (dB)	Attenuation (Absolute Value) II) (dB)
LFL152G45TC1A219	2450.0	fo±50.0	0.45 max. (at 25°C)	21.0 min. at 2x(fo±50.0)MHz	21.0 min. at 3x(fo±50.0)MHz
LFL18815MTC2A072	815.5	fo±9.5	0.80 max. (at 25°C)	35.0 min. at 2x(fo±9.5)MHz	30.0 min. at 3x(fo±9.5)MHz
LFL18924MTC1A052	924.5	fo±35.0	0.40 max. (at 25°C)	20.0 min. at 2x(fo±35.0)MHz	15.0 min. at 3x(fo±35.0)MHz
LFL182G45TC1A108	2450.0	fo±50.0	0.37 max. (at 25°C)	27.0 min. at 4800~5000MHz	25.0 min. at 7200~7500MHz
LFL182G45TC1A202	2450.0	fo±50.0	0.40 max. (at 25°C)	27.0 min. at 4800~5000MHz	30.0 min. at 7200~7500MHz
LFL21600MTC1A002	600.0	fo±250.0	1.37 max. (at 25°C)	20.0 min. at 1550~4250MHz	9.0 min. at 1100MHz
LFL21847MTC1A006	847.5	fo±37.5	0.75 max. (at 25°C)	30.0 min. at 2x(fo±37.5)MHz	30.0 min. at 3x(fo±37.5)MHz
LFL21902MTC1A018	902.5	fo±12.5	0.6 max. (at 25°C)	30.0 min. at 2x(fo±12.5)MHz	30.0 min. at 3x(fo±12.5)MHz
LFL211G35TC1A001	1350.0	fo±250.0	0.92 max. (at 25°C)	25.0 min. at 2300~5000MHz	-
LFL211G44TC1A014	1441.0	fo±12.0	0.47 max. (at 25°C)	31.0 min. at 2xfoMHz	26.0 min. at 3xfoMHz
LFL211G79TC1A011	1795.0	fo±85.0	0.47 max. (at 25°C)	30.0 min. at 2x(1747.5±37.5)MHz	25.0 min. at 2x(1842.5±37.5)MHz
LFL211G89TC1A015	1890.0	fo±10.0	0.47 max. (at 25°C)	30.0 min. at 2x(fo±10.0)MHz	26.0 min. at 3x(fo±10.0)MHz
LFL211G90TC1A008	1907.5	fo±12.5	0.47 max. (at 25°C)	30.0 min. at 2x(fo±12.5)MHz	25.0 min. at 3x(fo±12.5)MHz
LFL211G92TC1A060	1920.0	fo±70.0	0.6 max. (at 25°C)	24.0 min. at 3335~3700MHz	30.0 min. at 3700~3820MHz
LFL212G45TC1A007	2450.0	fo±50.0	0.50 max. (at 25°C)	27.0 min. at 2x(fo±50.0)MHz	30.0 min. at 3x(fo±50.0)MHz
LFL215G25TC1A156	5250.0	fo±100.0	0.70 max. (at 25°C)	24.0 min. at 2x(fo±100)MHz	19.0 min. at 3x(fo±100)MHz
LFL215G37TC1A210	5375.0	fo±475.0	0.70 max. (at 25°C)	30.0 min. at 2x(fo±475)MHz	20.0 min. at 3x(fo±475)MHz
LFL215G51TC1A149	5512.0	fo±363.0	0.70 max. (at 25°C)	30.0 min. at 2x(fo±363)MHz	20.0 min. at 3x(fo±363)MHz
LFL215G78TC1A155	5787.5	fo±62.5	0.70 max. (at 25°C)	30.0 min. at 2x(fo±62.5)MHz	20.0 min. at 3x(fo±62.5)MHz

7 Filters for Communication Equipment

for RF/Local

Chip Multilayer LC Filters (HPF)


● LFH32_RA Series (1210)

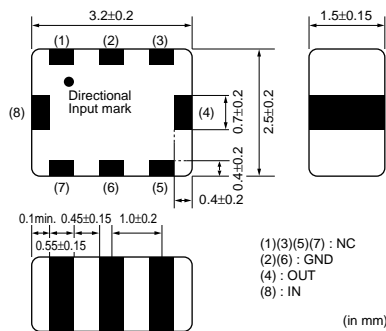

Terminal of "NC" should not be fixed to any pattern.
 All the technical data and information contained herein are subject to change without prior notice.

(in mm)

Frequency Characteristics

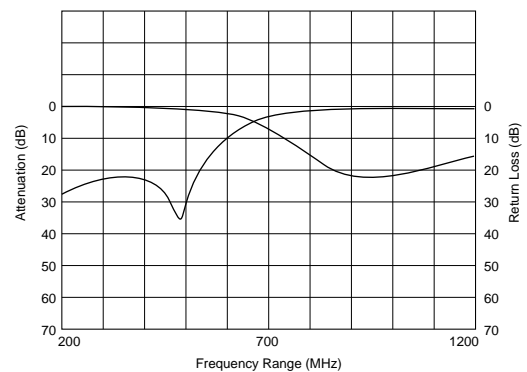


Part Number	Nominal Center Frequency (fo) (MHz)	Bandwidth (BW) (MHz)	Insertion Loss in BW (dB)	Attenuation (Absolute Value) I) (dB)	Attenuation (Absolute Value) II) (dB)
LFH32942MRA1A517	942.5	fo±17.5	0.5 max. (at 25°C)	4.5 min. at 480~600MHz	25.0 min. at 480MHz

Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
 • You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.


for RF/Local

Chip Multilayer Diplexers

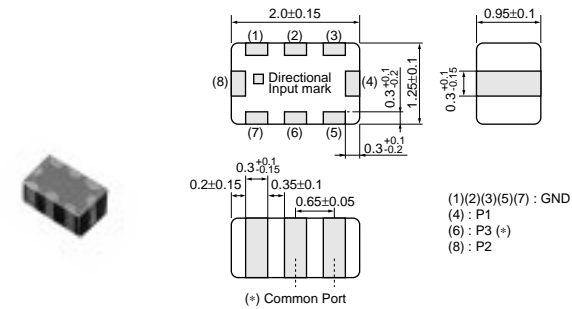

LFD21 Series

All the technical data and information contained herein are subject to change without prior notice. (in mm)

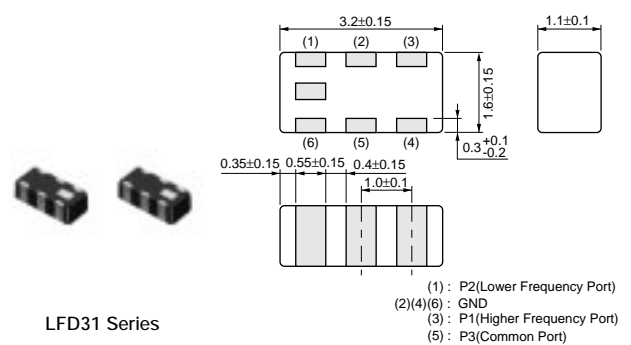


LFD31 Series

* All the technical data and information contained herein are subject to change without prior notice. (in mm)

Part Number	Frequency Range[P1](f1) (MHz)	Frequency Range[P2](f2) (MHz)	Insertion Loss [P1-P3](in f1) (dB)	Insertion Loss [P2-P3](in f2) (dB)	Attenuation [P1-P3](in f2) (dB)	Attenuation [P2-P3](in f1) (dB)
LFD212G45DP3A140	5250.0 ±100.0MHz	2450.0 ±50.0MHz	0.65 max. (at 25°C)	0.50 max. (at 25°C)	20.0 min.	20.0 min.
LFD212G45DP3A151	5487.5 ±337.5MHz	2450.0 ±50.0MHz	0.75 max. (at 25°C)	0.50 max. (at 25°C)	20.0 min.	16.0 min.
LFD212G45DP3A188	5375.0 ±475.0MHz	2450.0 ±50.0MHz	0.75 max. (at 25°C)	0.50 max. (at 25°C)	21.0 min.	17.0 min.
LFD212G45DP4A189	2450.0 ±50.0MHz	5375.0 ±475.0MHz	0.5 max. (at 25°C)	0.75 max. (at 25°C)	17.0 min.	21.0 min.
LFD21859MDP1A049	1920.0 ±70.0MHz	859.0 ±35.0MHz	0.45 max. (at 25°C)	0.40 max. (at 25°C)	19.0 min.	20.0 min.
LFD21884MDP1A062	1906.5 ±13.0MHz	884.0 ±74.0MHz	0.45 max. (at 25°C)	0.50 max. (at 25°C)	20.0 min.	20.0 min.
LFD21920MDP1A048	1795.0 ±85.0MHz	920.0 ±40.0MHz	0.55 max. (at 25°C)	0.50 max. (at 25°C)	20.0 min.	16.0 min.
LFD31859MDP1A009	1920.0 ±70.0MHz	859.0 ±35.0MHz	0.45 max. (at 25°C)	0.40 max. (at 25°C)	20.0 min.	20.0 min.
LFD31884MDP1A030	1906.5 ±13.0MHz	884.0 ±74.0MHz	0.45 max. (at 25°C)	0.50 max. (at 25°C)	19.0 min.	19.0 min.
LFD31897MDP1A010	1810.0 ±100.0MHz	897.5 ±17.5MHz	0.6 max. (at 25°C)	0.5 max. (at 25°C)	20.0 min.	17.0 min.
LFD31920MDP1A003	1795.0 ±85.0MHz	920.0 ±40.0MHz	0.55 max. (at 25°C)	0.50 max. (at 25°C)	20.0 min.	16.0 min.
LFD31920MDP1A040	1850.0 ±140.0MHz	920.0 ±40.0MHz	0.65 max. (at 25°C)	0.50 max. (at 25°C)	20.0 min.	15.0 min.
LFD31993MDP1A032	2072.34 ±30.0MHz	993.84 ±12.5MHz	0.4 max. (at 25°C)	0.4 max. (at 25°C)	20.0 min.	20.0 min.

for RF/Local

Chip Multilayer LC Filters (Trap)

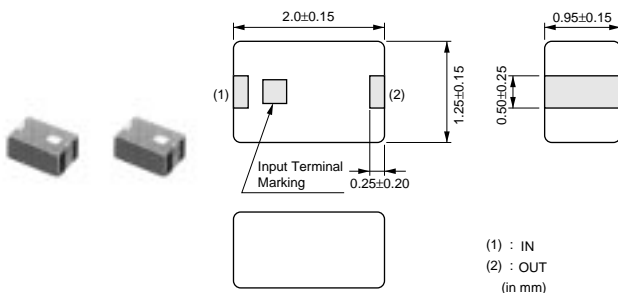


Part Number	Center Frequency of Rejection Band (MHz)	Pass Bandwidth (BW) (MHz)	Insertion Loss in BW (dB)	Attenuation (Absolute Value) (dB)
LFE21560MFA1A004	560.0	810-885	0.7 max. (at 25°C)	10.0 min. at 550-570MHz

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
 • You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.


for RF/Local

SAW Filters


● GPS




SAFSD1G57FA0T00



SAFSE1G57KA0T05

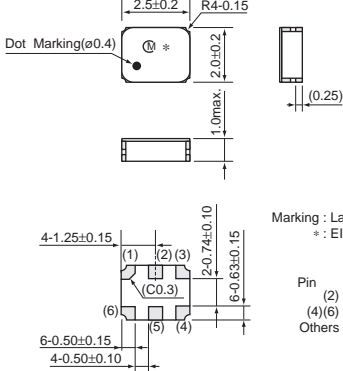


Dot Marking(ø0.4) $\text{R}4-0.15$
 2.5 ± 0.2
 2.0 ± 0.2
 1.0 max.
 $4-1.25 \pm 0.15$
 $6-0.50 \pm 0.15$
 $4-0.50 \pm 0.10$
 $2-0.74 \pm 0.10$
 $6-0.63 \pm 0.15$
 Marking : Laser Printing
 * : EIAJ Code
 Pin
 (2) : Input
 (4)(6) : Output
 Others : Ground
 (in mm)

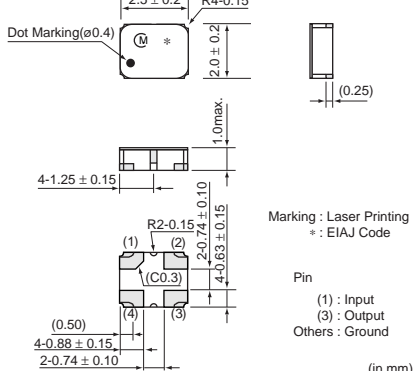


Dot Marking(ø0.4) $\text{R}4-0.15$
 2.5 ± 0.2
 2.0 ± 0.2
 1.0 max.
 $4-1.25 \pm 0.15$
 $4-0.88 \pm 0.15$
 $2-0.74 \pm 0.10$
 $4-0.63 \pm 0.15$
 $\text{R}2-0.15$
 Marking : Laser Printing
 * : EIAJ Code
 Pin
 (1) : Input
 (3) : Output
 Others : Ground
 (in mm)

Part Number	Center Frequency (MHz)	Insertion Loss (dB)	Ripple (dB max.)	VSWR	Input Impedance	Output Impedance
SAFSE1G57KC0T00	1575.5	2.5 max. (1574MHz-1577MHz)	0.7 (1574MHz-1577MHz)	1.6max (1574MHz-1577MHz)	50ohm	50ohm
SAFSD1G57FA0T00	1575.5	1.6 max. (1574MHz-1577MHz)	0.5 (1574MHz-1577MHz)	1.6max. (1574MHz-1577MHz)	50ohm	100ohm
SAFSE1G57KA0T05	1575.5	1.6 max. (1574MHz-1577MHz)	0.7 (1574MHz-1577MHz)	1.6max. (1574MHz-1577MHz)	50ohm	50ohm
SAFSE1G57KA0T09	1575.42	2.0 max. (1574.42MHz-1576.42MHz)	1.5 (1574.42MHz-1576.42MHz)	1.8max. (1574.42MHz-1576.42MHz)	50ohm	50ohm


● GSM850




SAFEH881MFM0F00



SAFSD881MFL0T50

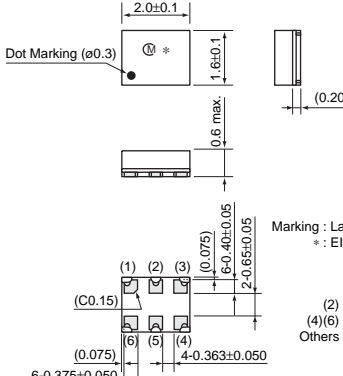

Dot Marking(ø0.3) $\text{R}4-0.15$
 2.0 ± 0.1
 1.6 ± 0.1
 0.6 max.
 $4-1.25 \pm 0.15$
 $6-0.375 \pm 0.050$
 $6-0.40 \pm 0.05$
 $2-0.63 \pm 0.05$
 Marking : Laser Printing
 * : EIAJ Code
 Pin
 (2) : Input
 (4)(6) : Output
 Others : Ground
 (in mm)

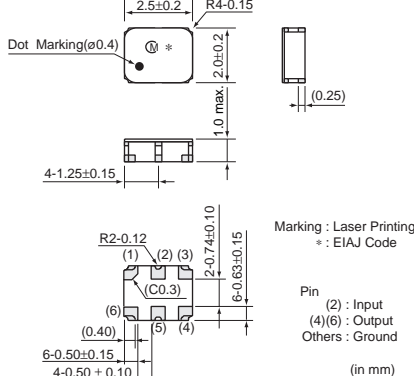


Dot Marking(ø0.4) $\text{R}4-0.15$
 2.5 ± 0.2
 2.0 ± 0.2
 1.0 max.
 $4-1.25 \pm 0.15$
 $6-0.50 \pm 0.15$
 $4-0.50 \pm 0.10$
 $2-0.74 \pm 0.10$
 $6-0.63 \pm 0.15$
 $\text{R}2-0.12$
 Marking : Laser Printing
 * : EIAJ Code
 Pin
 (2) : Input
 (4)(6) : Output
 Others : Ground
 (in mm)

Part Number	Center Frequency (MHz)	Insertion Loss (dB)	Ripple (dB max.)	VSWR	Input Impedance	Output Impedance
SAFEH881MFM0F00	881.5	2.4 max. (869MHz-894MHz)	1.5 (869MHz-894MHz)	1.9max. (869MHz-894MHz)	50ohm	150ohm/82nH
SAFSD881MFL0T50	881.5	3.0 max. (869MHz-894MHz)	1.4 (869MHz-894MHz)	2.0max. (869MHz-894MHz)	50ohm	200ohm/82nH

Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
 • You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

● GSM850/GSM1900 Dual Band


SAWSP881MGA0T00

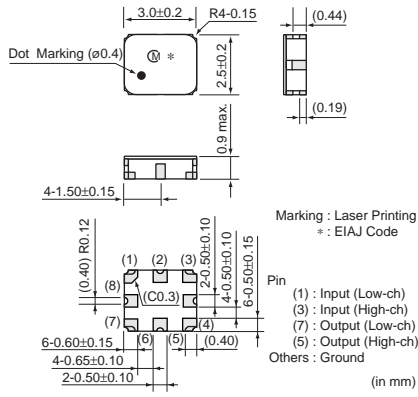


Part Number	Center Frequency (MHz)	Insertion Loss (dB)	Ripple (dB max.)	VSWR	Input Impedance	Output Impedance
SAWSP881MGA0T00(881.5)	881.5	2.9 max. (869MHz-894MHz)	1.5 (869MHz-894MHz)	2.0max. (869MHz-894MHz)	50ohm	50ohm
SAWSP881MGA0T00(1960)	1960	3.2 max. (1930MHz-1990MHz)	2.0 (1930MHz-1990MHz)	2.4max. (1930MHz-1990MHz)	50ohm	50ohm
SAWSU881MCQ0T01(881.5)	881.5	3.0 max. (869MHz-894MHz)	1.8 (869MHz-894MHz)	2.0max. (869MHz-894MHz)	50ohm	200ohm//56nH
SAWSU881MCQ0T01(1960)	1960	3.0 max. (1930MHz-1990MHz)	2.4 (1930MHz-1990MHz)	2.2max. (1930MHz-1990MHz)	50ohm	200ohm//15nH

● GSM900


SAFEH942MFN0F00

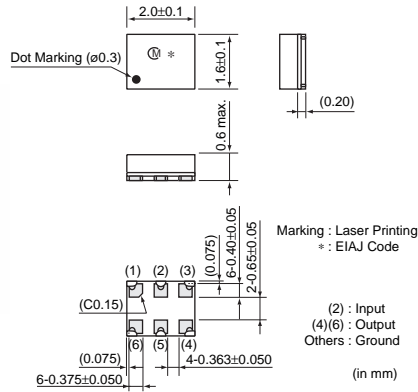

SAFSD942MCL0T00

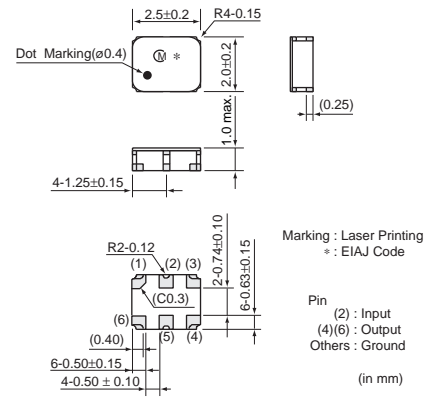


SAFCC942MAM0T00

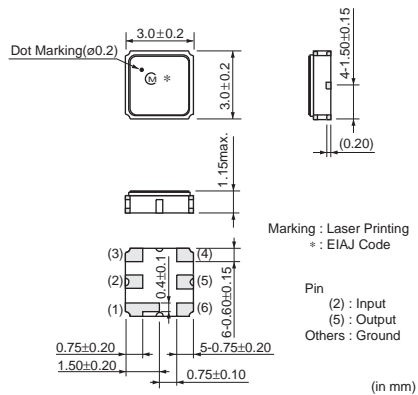

Part Number	Center Frequency (MHz)	Insertion Loss (dB)	Ripple (dB max.)	VSWR	Input Impedance	Output Impedance
SAFEH942MFN0F00	942.5	2.7 max. (925MHz-960MHz)	1.8 (925MHz-960MHz)	2.0max. (925MHz-960MHz)	50ohm	150ohm//82nH
SAFSD942MFM0T00	942.5	3.2 max. (925MHz-960MHz)	2.2 (925MHz-960MHz)	2.3max. (925MHz-960MHz)	50ohm	200ohm//82nH
SAFSD942MCL0T00	942.5	3.3 max. (925MHz-960MHz)	1.8 (925MHz-960MHz)	2.0max. (925MHz-960MHz)	50ohm	50ohm
SAFSE942MAL0T05	942.5	3.2 max. (925MHz-960MHz)	2.0 (925MHz-960MHz)	2.2max. (925MHz-960MHz)	50ohm	50ohm
SAFCC942MAM0T00	942.5	4.2 max. (925MHz-960MHz)	2.5 (925MHz-960MHz)	2.4max. (925MHz-960MHz)	50ohm	50ohm
SAFCC897MKA0T00	897.5	3.2 max. (880MHz-915MHz)	1.8 (880MHz-915MHz)	2.2max. (880MHz-915MHz)	50ohm	50ohm


● GSM900/GSM1800 Dual Band

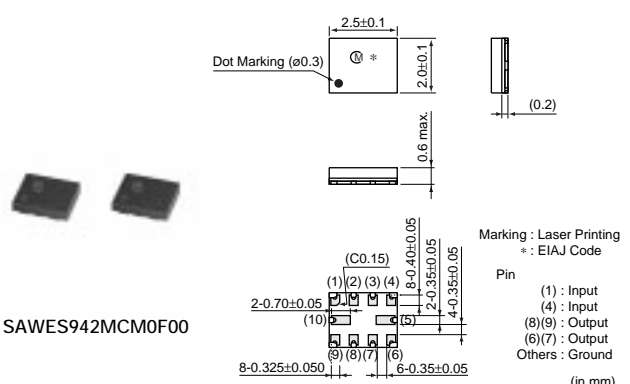

SAWES942MCM0F00

Marking : Laser Printing
* : EIAJ Code


Pin
(1) : Input
(4) : Input
(8)(9) : Output
(6)(7) : Output
Others : Ground
(in mm)

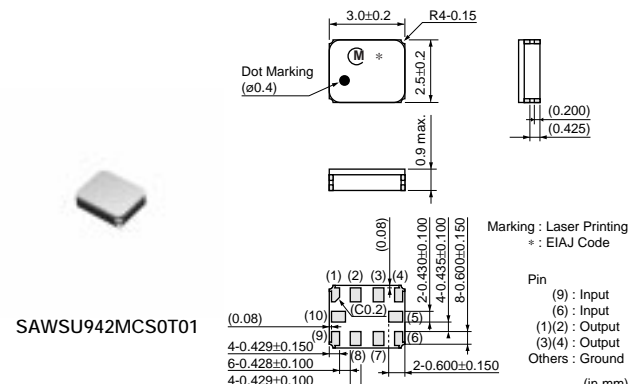

SAWSU942MCS0T01

Marking : Laser Printing
* : EIAJ Code

Pin
(9) : Input
(6) : Input
(1)(2) : Output
(3)(4) : Output
Others : Ground
(in mm)

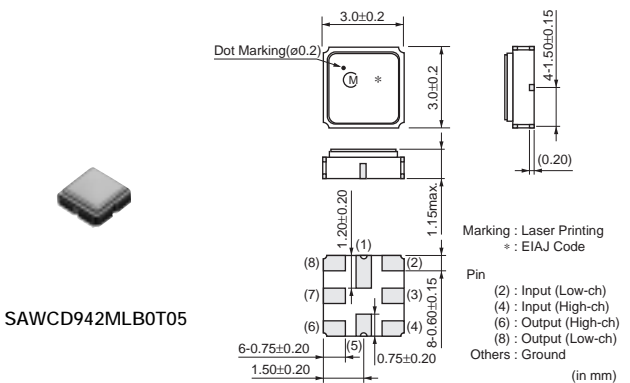

SAWCD942MLB0T05

Marking : Laser Printing
* : EIAJ Code

Pin
(2) : Input (Low-ch)
(4) : Input (High-ch)
(6) : Output (High-ch)
(8) : Output (Low-ch)
Others : Ground
(in mm)

Part Number	Center Frequency (MHz)	Insertion Loss (dB)	Ripple (dB max.)	VSWR	Input Impedance	Output Impedance
SAWES942MCM0F00(942.5)	942.5	2.8 max. (925MHz-960MHz)	1.5 (925MHz-960MHz)	2.0max. (925MHz-960MHz)	50ohm	150ohm//56nH
SAWES942MCM0F00(1842.5)	1842.5	3.0 max. (1805MHz-1880MHz)	1.8 (1805MHz-1880MHz)	2.2max. (1805MHz-1880MHz)	50ohm	150ohm//18nH
SAWSP942MLD0T00(942.5)	942.5	3.0 max. (925MHz-960MHz)	2.0 (925MHz-960MHz)	2.5max. (925MHz-960MHz)	50ohm	50ohm
SAWSP942MLD0T00(1842.5)	1842.5	3.2 max. (1805MHz-1880MHz)	2.0 (1805MHz-1880MHz)	2.5max. (1805MHz-1880MHz)	50ohm	50ohm
SAWSU942MCS0T01(942.5)	942.5	3.2 max. (925MHz-960MHz)	2.2 (925MHz-960MHz)	2.4max. (925MHz-960MHz)	50ohm	200ohm//47nH
SAWSU942MCS0T01(1842.5)	1842.5	3.2 max. (1805MHz-1880MHz)	2.2 (1805MHz-1880MHz)	2.5max. (1805MHz-1880MHz)	50ohm	200ohm//16nH


Continued on the following page. ↗

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

Continued from the preceding page.

Part Number	Center Frequency (MHz)	Insertion Loss (dB)	Ripple (dB max.)	VSWR	Input Impedance	Output Impedance
SAWCD942MLB0T05(942.5)	942.5	3.0 max. (925MHz-960MHz)	2.5 (925MHz-960MHz)	2.5max. (925MHz-960MHz)	50ohm	50ohm
SAWCD942MLB0T05(1842.5)	1842.5	3.2 max. (1805MHz-1880MHz)	2.2 (1805MHz-1880MHz)	2.5max. (1805MHz-1880MHz)	50ohm	50ohm

● GSM1800

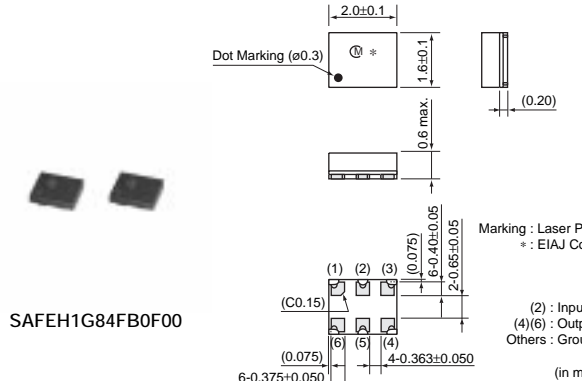

SAFEH1G84FB0F00

Dot Marking (ø0.3)

2.0±0.1

1.6±0.1

0.6 max.

(0.20)

Marking : Laser Printing
* : EIAJ Code

(1) (2) (3)
(C0.15)

6-0.40±0.05

2-0.65±0.05


(0.075)

6-0.375±0.050

4-0.363±0.050

(in mm)

Pin
(2) : Input
(4)(6) : Output
Others : Ground

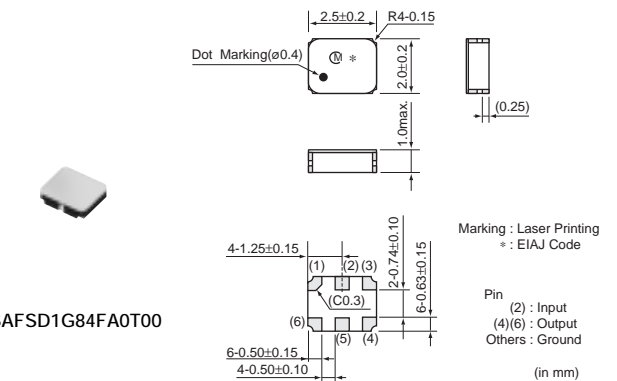

SAFSD1G84FA0T00

Dot Marking (ø0.4)

2.5±0.2

R4-0.15

2.0±0.2

1.0max.

(0.25)

Marking : Laser Printing
* : EIAJ Code

(1) (2) (3)
(C0.3)

4-1.25±0.15

2-0.74±0.10


6-0.63±0.15

6-0.50±0.15

4-0.50±0.10

(in mm)

Pin
(2) : Input
(4)(6) : Output
Others : Ground

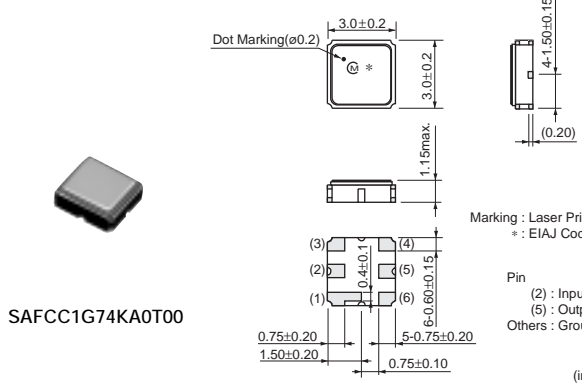

SAFCC1G74KA0T00

Dot Marking (ø0.2)

3.0±0.2

3.0±0.2

1.15max.

(0.20)

Marking : Laser Printing
* : EIAJ Code

Pin
(2) : Input
(5) : Output
Others : Ground

(3) (4)
(2) (5)
(1) (6)

0.4±0.1

6-0.60±0.15

0.75±0.20

1.50±0.20


5-0.75±0.20

0.75±0.10

(in mm)


Part Number	Center Frequency (MHz)	Insertion Loss (dB)	Ripple (dB max.)	VSWR	Input Impedance	Output Impedance
SAFEH1G84FB0F00	1842.5	2.5 max. (1805-1880MHz)	1.5 (1805MHz-1880MHz)	2.2max. (1805MHz-1880MHz)	50ohm	150ohm//18nH
SAFSE1G84KA0T00	1842.5	3.2 max. (1805-1880MHz)	2.2 (1805MHz-1880MHz)	2.8max. (1805MHz-1880MHz)	50ohm	50ohm
SAFSD1G84FA0T00	1842.5	3.0 max. (1805-1880MHz)	2.0 (1805MHz-1880MHz)	2.7max. (1805MHz-1880MHz)	50ohm	200ohm//27nH
SAFSD1G84CB0T00	1842.5	3.8 max. (1805-1880MHz)	2.0 (1805MHz-1880MHz)	2.7max. (1805MHz-1880MHz)	50ohm	50ohm
SAFCC1G84KA0T00	1842.5	4.2 max. (1805-1880MHz)	2.8 (1805MHz-1880MHz)	2.8max. (1805MHz-1880MHz)	50ohm	50ohm
SAFCC1G74KA0T00	1747.5	4.2 max. (1710MHz-1785MHz)	2.6 (1710MHz-1785MHz)	2.5max. (1710MHz-1785MHz)	50ohm	50ohm

● GSM1800/GSM1900

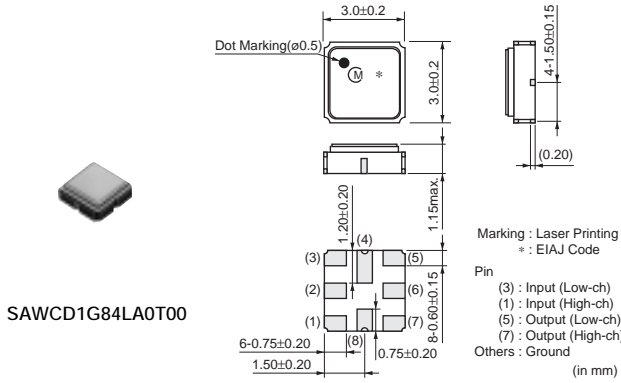

Part Number	Center Frequency (MHz)	Insertion Loss (dB)	Ripple (dB max.)	VSWR	Input Impedance	Output Impedance
SAWCD1G84LA0T00(1960)	1960	3.5 max. (1930MHz-1990MHz)	2.3 (1930MHz-1990MHz)	2.4max. (1930MHz-1990MHz)	50ohm	50ohm
SAWCD1G84LA0T00(1842.5)	1842.5	4.0 max. (1805MHz-1880MHz)	2.5 (1805MHz-1880MHz)	2.5max. (1805MHz-1880MHz)	50ohm	50ohm

● GSM1900

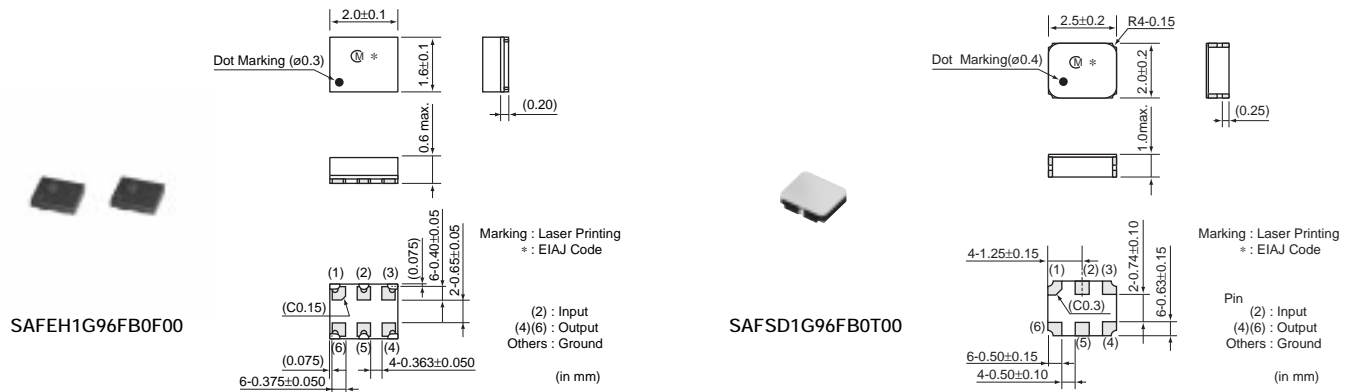

Part Number	Center Frequency (MHz)	Insertion Loss (dB)	Ripple (dB max.)	VSWR	Input Impedance	Output Impedance
SAFEH1G96FB0F00	1960	2.6 max. (1930-1990MHz)	1.8 (1930MHz-1990MHz)	2.2max. (1930MHz-1990MHz)	50ohm	150ohm//22nH
SAFSE1G96KD0T00	1960	3.0 max. (1930-1990MHz)	2.0 (1930MHz-1990MHz)	2.5max. (1930MHz-1990MHz)	50ohm	50ohm
SAFSD1G96FB0T00	1960	3.0 max. (1930-1990MHz)	2.4 (1930MHz-1990MHz)	2.4max. (1930MHz-1990MHz)	50ohm	200ohm//22nH


7 Filters for Communication Equipment

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

● J-CDMA



SAFSE851MKB0T00

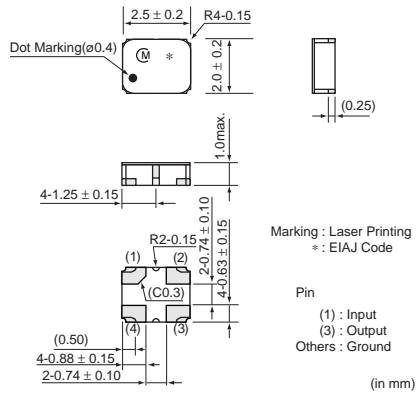


Part Number	Center Frequency (MHz)	Insertion Loss (dB)	Ripple (dB max.)	VSWR	Input Impedance	Output Impedance
SAFSE906MAM0T00	906	4.0 max. (887MHz-925MHz)	2.5 (887MHz-925MHz)	2.4max. (887MHz-925MHz)	50ohm	50ohm
SAFSE851MKB0T00	851	3.4 max. (832MHz-870MHz)	2.5 (832MHz-870MHz)	2.2max. (832MHz-870MHz)	50ohm	50ohm
SAFSD906MCL0T00	906	4.2 max. (887MHz-925MHz)	2.5 (887MHz-925MHz)	2.8max. (887MHz-925MHz)	50ohm	50ohm
SAFSD851MXA0T00	851	2.6 max. (832MHz-870MHz)	1.9 (832MHz-870MHz)	2.7max. (832MHz-870MHz)	50ohm	100ohm//56nH


● PCS (CDMA)




SAFSD1G96FL0T00

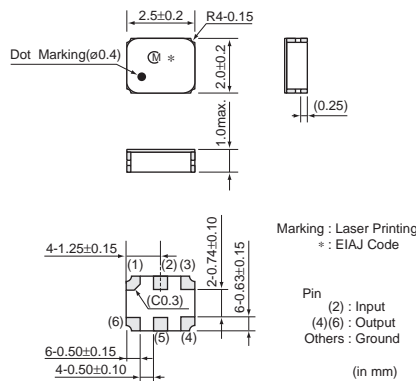

SAWCD1G86LA0T00

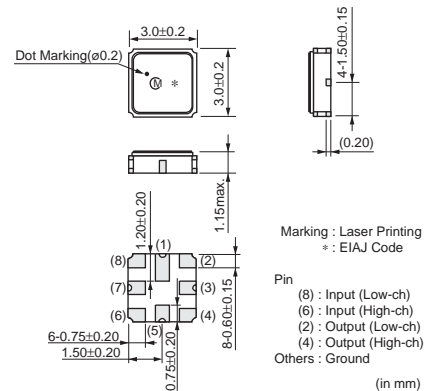

SAFCC1G88KA0T00

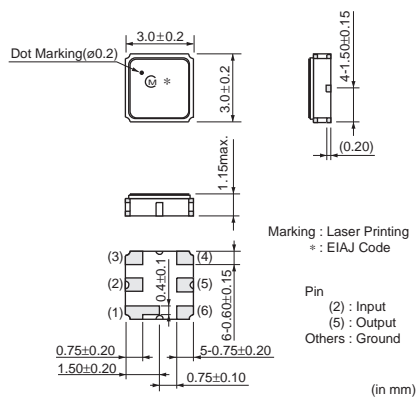


△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

Part Number	Center Frequency (MHz)	Insertion Loss (dB)	Ripple (dB max.)	VSWR	Input Impedance	Output Impedance
SAFSE1G88KC0T00	1880	5.0 max. (1850MHz-1910MHz)	3.5 (1850MHz-1910MHz)	2.2max. (1850MHz-1910MHz)	50ohm	50ohm
SAFSD1G96FL0T00	1960	4.0 max. (1930MHz-1990MHz)	2.0 (1930MHz-1990MHz)	2.1max. (1930MHz-1990MHz)	50ohm	100ohm
SAWCD1G86LA0T00(1897.5)	1897.5	3.2 max. (1885MHz-1910MHz)	2.0 (1885MHz-1910MHz)	2.0max. (1885MHz-1910MHz)	50ohm	50ohm
SAWCD1G86LA0T00(1867.5)	1867.5	3.2 max. (1850MHz-1885MHz)	2.0 (1850MHz-1885MHz)	2.0max. (1850MHz-1885MHz)	50ohm	50ohm
SAFCC1G96KA0T00	1960	4.5 max. (1930MHz-1990MHz)	3.0 (1930MHz-1990MHz)	2.5max. (1930MHz-1990MHz)	50ohm	50ohm
SAFCC1G88KA0T00	1880	4.5 max. (1850MHz-1910MHz)	3.0 (1850MHz-1910MHz)	2.5max. (1850MHz-1910MHz)	50ohm	50ohm


● W-CDMA



SAFZD2G14FC0F00

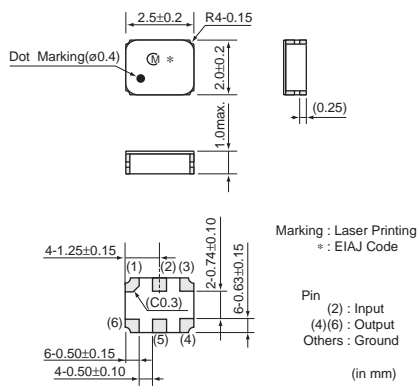

SAFSD1G95FA0T00

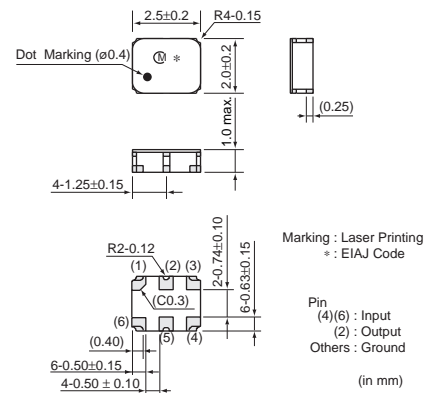

Part Number	Center Frequency (MHz)	Insertion Loss (dB)	Ripple (dB max.)	VSWR	Input Impedance	Output Impedance
SAFZD2G14FC0F00	2140	2.7 max. (2110-2170MHz)	1.3 (2110MHz-2170MHz)	2.3max. (2110MHz-2170MHz)	50ohm	100ohm
SAFSE1G95KD0F00	1950	3.2 max. (1920-1980MHz)	1.5 (1920MHz-1980MHz)	2.6max. (1920MHz-1980MHz)	50ohm	50ohm
SAFSE2G14KB0T00	2140	2.7 max. (2110-2170MHz)	1.3 (2110MHz-2170MHz)	2.0max. (2110MHz-2170MHz)	50ohm	50ohm
SAFSE1G95KC0T00	1950	3.0 max. (1920-1980MHz)	1.5 (1920MHz-1980MHz)	2.0max. (1920MHz-1980MHz)	50ohm	50ohm
SAFSD2G14FA0T00	2140	2.7 max. (2110MHz-2170MHz)	1.5 (2110MHz-2170MHz)	2.2max (2110MHz-2170MHz)	50ohm	200ohm//22nH
SAFSD1G95FA0T00	1950	3.2 max. (1920-1980MHz)	1.6 (1920MHz-1980MHz)	2.1max. (1920MHz-1980MHz)	200ohm//22nH	50ohm

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.